

AUTOMATIC
oi***UV Flame Detector**
X2200**DESCRIPTION**

Y E A R

3

WARRANTY

The evolution continues with the new X2200 UV Flame Detector. The X2200 is the most advanced UV detector meeting standards and approvals worldwide, combined with a superior mechanical design. The detector is equipped with automatic, manual and magnetic **oi** test capability. The detector has Division and Zone explosion-proof ratings and is suitable for use in a variety of applications.

The standard output configuration includes fire, fault and auxiliary relays. An optional 4 to 20 mA output can be provided in addition to the three relays. A model with pulse output is available for easy retrofitting into existing Det-Tronics controller based systems. Auxiliary relay and 4 to 20 mA output are not available with the pulse model. A tricolor LED on the detector faceplate indicates detector status condition.

The X2200 housing is available in aluminum or stainless steel, with NEMA 4X and IP66 rating.

Typical applications include:

- Hydrogen storage
- Munitions
- Silane storage
- Turbines.

***oi** is Detector Electronics' Trademark for its patented Optical Integrity Systems, U.S. Patent 3,952,196, United Kingdom Patent 1,534,969, Canada Patent 1,059,598.

FEATURES

- FM 3260 (2000).
- ATEX Directive Compliant.
- Advanced signal processing.
- Arc — unequaled false alarm rejection.
- Responds to a fire in the presence of modulated blackbody radiation (i.e. heaters, ovens, turbines) without false alarm.
- High speed capability.
- Automatic, manual or magnetic optical integrity (**oi**) testing — no external test lamp required..
- Easily replaceable **oi** plate.
- Fire, fault and auxiliary relays standard.
- MODBUS RS-485 output.
- 4 to 20 mA isolated output (optional).
- Pulse output for compatibility with controller based systems (optional).
- Tricolor LED indicates normal operation, fire and fault conditions.
- Mounting swivel allows easy sighting.
- Integral wiring compartment for ease of installation.
- Class A wiring per NFPA-72.
- Meets NFPA-33 response requirement for under 0.5 second (available when model selected).
- EMI and RFI protected, EMC Directive Compliant.
- Built-in data logging / event monitoring.

SPECIFICATIONS

Operating Voltage	24 vdc. Operating range is 18 to 30 vdc.
Power Consumption	2.5 watts @ 24 vdc nominal. 7.6 watts @ 30 vdc with EOL resistor maximum.
Relays	Contacts rated 5 amperes at 30 vdc. <u>Fire Alarm:</u> — Form C (NO and NC contacts) — normally de-energized — latching/non-latching. <u>Fault:</u> — Form A (NO contacts) — normally energized — latching/non-latching. <u>Auxiliary*:</u> — Form C (NO and NC contacts) — normally energized — latching/non-latching.
Current Output* (Optional)	4–20 mA, with a maximum loop resistance of 500 ohms from 18–19.9 vdc, 600 ohms from 20–30 vdc.
Temperature Range	<u>Operating:</u> –40°F to +167°F (–40°C to +75°C). <u>Storage:</u> –67°F to +185°F (–55°C to +85°C).
Humidity Range	0 to 95% relative humidity, can withstand 100% condensing humidity for short periods of time.
Field of View	The X2200 has a 90 degree cone of vision with the highest sensitivity lying along its central axis.
Warranty	3 years, sensor and electronics.
Enclosure Material	Copper-free aluminum or 316 stainless steel.

Response Characteristics


High Sensitivity

Fuel	Size	Distance (Feet)	Typical Response Time (Sec.)	Mode
n-Heptane	1 x 1 foot	60	1	Standard
n-Heptane	1 x 1 foot	60	1	Hi Arc
Methane	32 inch plume	70	1	Standard
Methane	32 inch plume	70	1	Hi Arc

NOTE: Refer to the X2200 instruction manual (form number 95-8549) for details regarding detector response.

*Auxiliary relay and 4 to 20 mA output are not available on pulse output model.

Certification



Class I, Div. 1, Groups B, C & D;
Class II, Div. 1, Groups E, F, & G;
Class I, Div. 2, Groups A, B, C & D (T3);
Class II, Div. 2, Groups F & G (T3);
Class III.
NEMA/Type 4X.

Increased Safety Model

0539 (Ex) II 2 GD
EEx de IIC T5–T6 T86°C
DEMKO 02 ATEX 132195
T6 (Tamb = –55°C to +60°C).
T5 (Tamb = –55°C to +75°C).
IP66.


Flameproof Model

0539 (Ex) II 2 GD
EEx d IIC T5–T6, T86°C
DEMKO 02 ATEX 132195
T6 (Tamb = –55°C to +60°C).
T5 (Tamb = –55°C to +75°C).
IP66.

Conduit Entry Size 3/4 inch NPT or 25 mm.

Shipping Weight (Approximate)
Aluminum: 6 pounds (2.7 kg).
Stainless Steel: 10 pounds (4.5 kg).

Dimensions Dimensions shown in inches (centimeters).

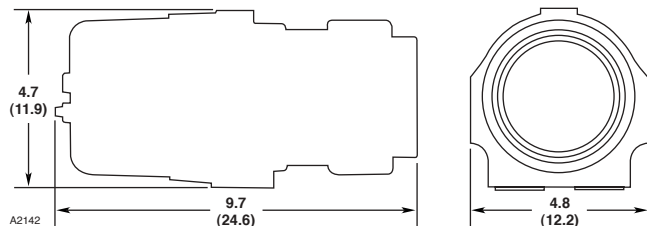

Wiring

12 AWG (2.5 mm²) to 22 AWG (0.5 mm²) shielded cable recommended.

9	4-20 mA +	19	4-20 mA –	SPARE	29
8	4-20 mA + REF	18	4-20 mA – REF	SPARE	28
7	COM FIRE	17		COM AUX	27
6	N.O. FIRE	16		N.O. AUX	26
5	N.C. FIRE	15		N.C. AUX	25
4	COM FAULT	14		RS-485 A	24
3	N.O. FAULT	13		RS-485 B	23
2	24 VDC +	12		MAN OI	22
1	24 VDC –	11		24 VDC –	21

Wiring Terminal Identification for Standard X2200



Detector Electronics Corporation

6901 West 110th Street • Minneapolis, Minnesota 55438 USA

Operator: (952) 941-5665 or (800) 765-FIRE

Customer Service: (952) 946-6491 • Fax (952) 829-8750

http://www.detronics.com • E-mail: detronics@detronics.com

